



www.candorsweden.com

Single wire plating

Nickel, silver, zink and tin on copper wire

The plant is mainly built of Polypropylene plastic and is placed within a stainless steel frame with adjustable feet.

All plants are custom designed to be adapted to the required capacity, wire dimensions, speed and space available.

The plant can be placed straight or in a L- or U-shape.

As all Candor plants it is totally covered and ventilated. A mist separator ensures that clean air is released to the environment.


In all our plants an efficient counter flow rinse system in several steps with thorough air wiping after the rinses guarantees a low water consumption, low consumption of chemicals and a cheaper effluent treatment.

All rinsing sections are equipped with our special designed airlift pumps with no moving parts. This contributes to low maintenance costs and trouble free operation.

Wastewater free systems are available with the use of a vacuum evaporator.

Complete systems with pay-off and take-up are supplied.

Single wire plating

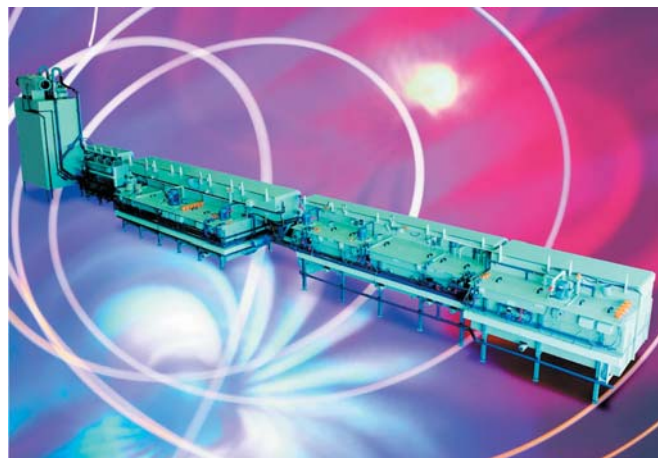

candor

Sverige / Norge / Danmark / Finland



Plating section

Technical specification

Wire material:	Copper and copper alloys
Wire dimension:	Ø 0,2-3,0 mm
Speed:	< 900 m/min.

Dimensions

Length:	13,5 m	(depending of wire diameter and speed)
Width:	2,0 m	
Height:	2,2 m	



www.candorsweden.com

Candor Sweden AB

Box 946
SE 601 19 NORRKÖPING
Tel: +46 11-21 75 00
Fax: +46 11-12 63 12
E-mail: info@candorsweden.com

Candor Norge A/S

c/o Candor Sweden AB
Box 946
SE 601 19 NORRKÖPING
Tel: +46 11-21 75 00
Fax: +46 11-12 63 12
E-mail: info@candorsweden.com

Candor Kemiske A/S

Gunhilds Plads 8
DK 7100 VEJLE
Tel: +45 70 25 15 33
Fax: +45 70 25 15 34
E-mail: candor@candordenmark.dk

Candor Oy

Hiojankuja 3
FI 02780 ESPOO
Tel: +358 9-819 07 20
Fax: +358 9-81 19 16
E-mail: info@candor.fi